

FARMADA

Born to Farm


Farming and ranching are the most hereditary jobs in the US. A recent study showed 56.3% of farmers and ranchers are most likely to have a parent do the same.

By being born into it, and raised to farm, farmers can lay claim to being some of the most experienced professionals out there. Experience is the key ingredient that helps ensure long term sustainability. It is what drives decision making. It is often the difference between failure and success!


Experience is what motivated Farmada™ to develop the Elxir™ fertilizer bar. The first four founding members of Farmada™ have over 100 years of experience developing, manufacturing, selling, and marketing agricultural implements! We saw the market need for versatile and cost-effective toolbars and proceeded to develop the 5 section Elxir™ fertilizer bar:




Key Features of 40 ft 5-section Elxir™ toolbar from Farmada™

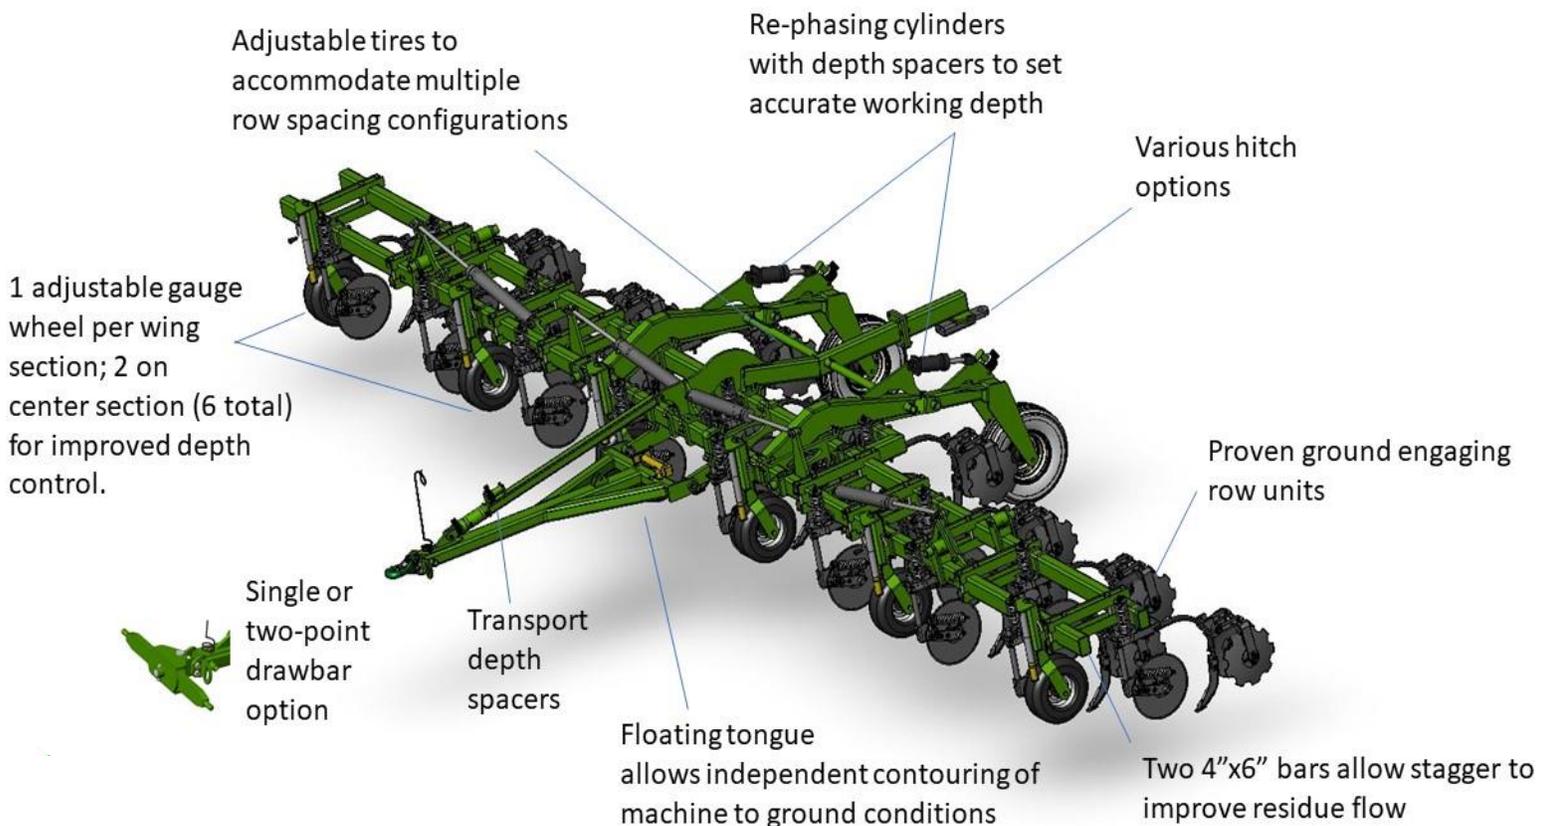

Elxir™ Precise Depth Control Mechanism

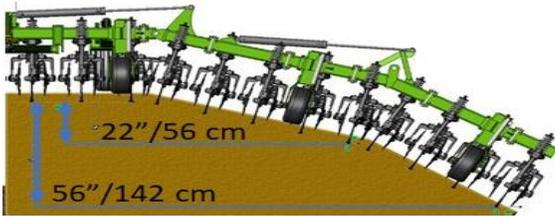

The frame can flex down 15 degrees per section (unlimited up flex). This lets the implement run over or along terraces while maintaining accurate working depth.

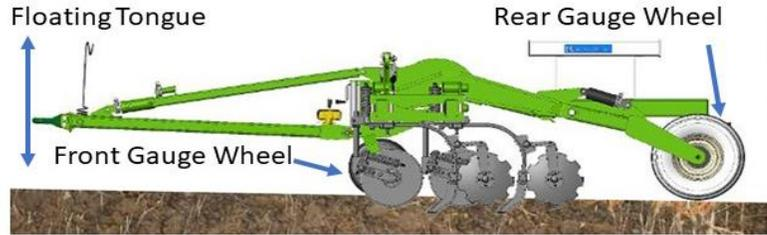


Working depth on the Elxir™ is measured off the front and rear gauge wheels. Combined with the floating tongue this feature enables the unit to maintain front to back depth on peaks and in valleys.

Standard Features

- ◆ 1 3/4" / 4.45cm medium carbon steel shaft
- ◆ 4" / 10.2cm vertical travel of blade and shank
- ◆ Up to 800 lb / 362 kg of down pressure
- ◆ Shanks and knives consist of 5160 USA made spring steel
- ◆ Shanks accept industry standard knives
- ◆ Maximum utility of sealers – they can run in multiple blade positions, angles or even as “hippers”

Options

- ◆ 20" / 50cm smooth or wavy blades coultter blades
- ◆ 14" / 35.5cm to 18" / 45.75cm notched or smooth sealer blades
- ◆ 450 styles of knives for virtually any agronomy plan: NH3, liquid, dry, Nutrisphere or any fertilizer combination!

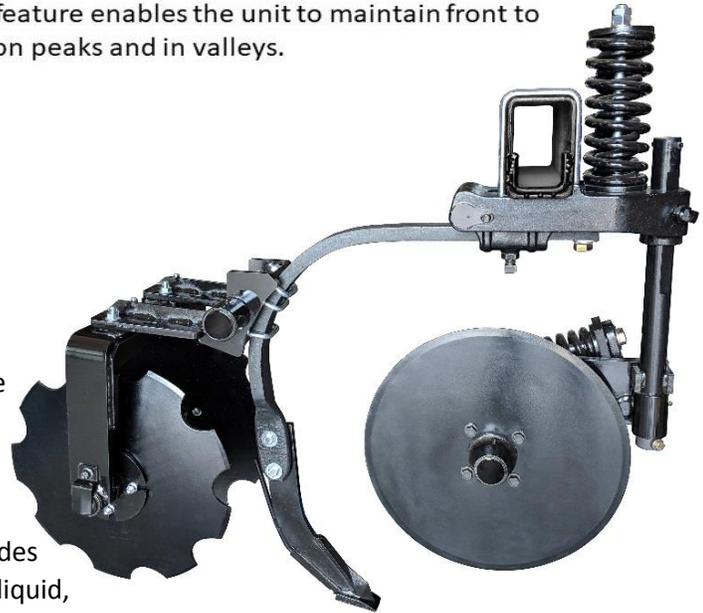

Machine Description	5-Section 40 ft Fertilizer Bar									
	30" even	30" odd	20" even	20" odd	70 cm even	70 cm odd	22" even	38" even	36" even	34" even
Row Spacing	30" even	30" odd	20" even	20" odd	70 cm even	70 cm odd	22" even	38" even	36" even	34" even
Number of rows	16	17	24	25	16	17	22	10	12	14
Weight lbs	14,126	**14,458	16,782	17,114	14,126	**14,458	16,118	12,134	12,798	13,462
Transport width	193" / 490cm									
Transport height	149" / 378cm									
Transport length	221 1/4" / 562cm									
Transport clearance	13" / 33cm									
Drawbar horsepower	200 +									
Tine depth	6" / 15 cm or less									
Disk depth	3 1/2" / 8.9cm or less									
Gauge wheel tires	6 tires 20.5x8									
Transport tires	9.5Lx15									
Row unit weight	332 lbs									
Notes	**Weight calculated off 17 row unit plus/minus 332 lb per row. Actual dimensions may vary slightly.									

Farmada, LLC ◆ 3200 S. Cunningham Rd
Salina, Kansas 67401 ◆ USA
Tel: +1-785-333-0012
Email: danielr@farmada.net
www.farmada.net

Dealer: